

LILLIPUT®

7" LED Field Monitor

with Advanced Functions

Specific Monitor by LILLIPUT with Broadcast Quality for DSLR & Full HD Camcorder
Application for Taking Photos & Making Movies. Strongly recommend for DSLR fans & directors!

Model NO.: **663** **663/P** **663/S**
(663/O) **(663/O/P)**

- 178° wide viewing angles
- High brightness: 400cd/㎡
- High contrast: 800:1
- Faster response time
- Wide voltage: DC 7-24V
- TALLY interface with indicating light
- Firm & portable design
- POP-UP shortcut menu



1280×800



Metal Shell




DESIGN

FOR BROADCASTS AND LIVE EVENTS



- ▶ Shortcut menu pop-up when function setting.
- ▶ Tally interface will be available when monitor becomes view finder of camcorder.
- ▶ Slim and portable, easy for installation.
- ▶ DC powered, Anton Bauer and other battery plates can be fixed on the back.

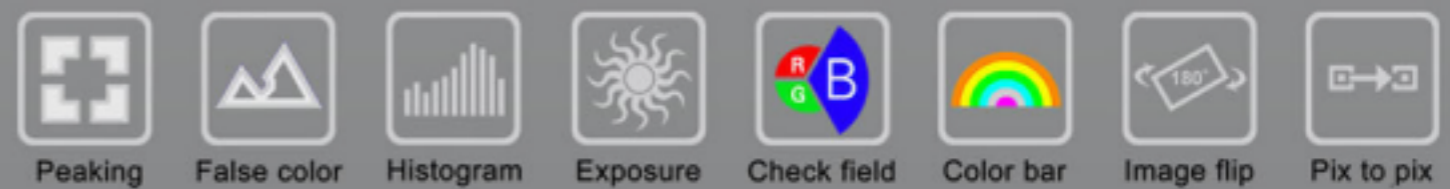


ADVANCED FUNCTIONS

Peaking



False Color

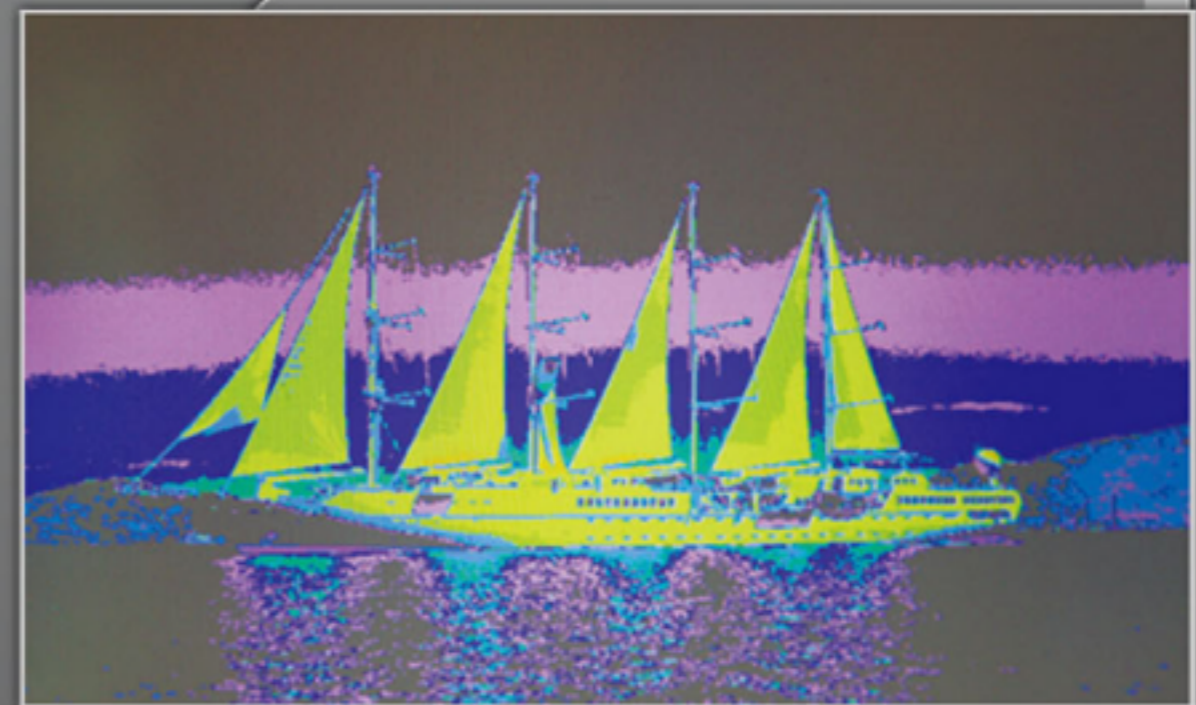

Exposure



Histogram



F1-F4:

4 user-definable buttons ▶

- | | | | |
|------------------|-------------------|------------------|-------------|
| > Peaking Filter | > False Colors | > Exposure | > Histogram |
| > Camera Mode | > Center Marker | > Pixel-to-Pixel | > Color Bar |
| > Screen Marker | > Aspect Ratio | > Check Field | > Underscan |
| > Freeze Input | > H/V Delay | > 8x Zoom | > PIP |
| > Flip H / V | > Backlit Control | | |

FEATURES



Wide Viewing Angles (IPS Panel)

178° horizontal & 178° vertical wide viewing angles, it's available for people viewing from different angles with the same visual effect.



Metal Shell

A good protection from vibration, water, dust & bad weather outside, with firm metal body. Longer life time for your device.



1280x800

1280x800 Higher resolution within 7 inch display. Enjoy new resolution revolution! Put 800x480 display aside.



SPECIFICATIONS / ACCESSORIES

DISPLAY	Panel	7" LED backlit	<table border="1"> <tbody> <tr> <td>1. Folding sun shade cover</td> <td>1 piece</td> </tr> <tr> <td>2. Shoe mount</td> <td>1 piece</td> </tr> <tr> <td>3. Battery plate (F-970, QM91D, DU21 or LP-E6)</td> <td>2 pieces</td> </tr> <tr> <td>4. HDMI A/C cable</td> <td>1 piece</td> </tr> <tr> <td>5. 12V DC adapter</td> <td>1 piece</td> </tr> <tr> <td>6. Power and TALLY cable</td> <td>1 piece</td> </tr> <tr> <td>7. Suitcase</td> <td>1 piece</td> </tr> <tr> <td>8. Manual</td> <td>1 copy</td> </tr> <tr> <td>9. V-mount battery plate (optional)</td> <td>1 piece</td> </tr> <tr> <td>10. Anton Bauer mount battery plate (optional)</td> <td>1 piece</td> </tr> </tbody> </table>	1. Folding sun shade cover	1 piece	2. Shoe mount	1 piece	3. Battery plate (F-970, QM91D, DU21 or LP-E6)	2 pieces	4. HDMI A/C cable	1 piece	5. 12V DC adapter	1 piece	6. Power and TALLY cable	1 piece	7. Suitcase	1 piece	8. Manual	1 copy	9. V-mount battery plate (optional)	1 piece	10. Anton Bauer mount battery plate (optional)	1 piece
	1. Folding sun shade cover	1 piece																					
	2. Shoe mount	1 piece																					
	3. Battery plate (F-970, QM91D, DU21 or LP-E6)	2 pieces																					
	4. HDMI A/C cable	1 piece																					
	5. 12V DC adapter	1 piece																					
6. Power and TALLY cable	1 piece																						
7. Suitcase	1 piece																						
8. Manual	1 copy																						
9. V-mount battery plate (optional)	1 piece																						
10. Anton Bauer mount battery plate (optional)	1 piece																						
Physical Resolution	1280×800																						
Aspect Ratio	16:9																						
Brightness	400cd/ m ²																						
Contrast	800:1																						
Viewing Angle	178°/ 178°(H/V) (IPS)																						
INPUT	3G-SDI	1(optional)																					
	HDMI	1																					
	YPbPr	3(BNC)																					
	Composite	1																					
	AUDIO L&R	1																					
	TALLY	1																					
OUTPUT	3G-SDI	1(optional)																					
	HDMI	1																					
AUDIO	Speaker	1(built-in)																					
	Ear Phone Slot	1(built-in)																					
POWER	Current	900mA																					
	Input Voltage	DC 7-24V (XLR Connector)																					
	Battery Plate	V-mount / Anton Bauer mount / F-970 / QM91D / DU21 / LP-E6																					
	Power Consumption	≤11W																					
ENVIRONMENT	Operating Temperature	-20°C~60°C																					
	Storage Temperature	-30°C~70°C																					
DIMENSION	Dimension(LWD)	191.5×152×31 / 141mm (with cover)																					
	Suitcase Dimension(LWD)	309×247×97.5mm																					
	Weight	760g / 938g (with cover) / 2160g (with suitcase)																					

